

Industrial Wall Exhaust Louvred Fan

FAB SHEET

FEATURES


- ✓ Galvanised steel body
- ✓ Rain cover
- ✓ Internal gravity louvres
- ✓ Safety wire guards
- ✓ Variable speed controller (3 phase model only)
- ✓ Supply or exhaust
- ✓ Used to exhaust heat, smoke, fumes, dust or provide ventilation

ADVANTAGES

- ✓ Heavy duty construction
- ✓ Prevents rain coming in
- ✓ Keeps out foreign objects & stops reverse airflow
- ✓ Prevents foreign objects passing
- ✓ Provides soft start & variable speed operation
- ✓ Multiple applications

BENEFITS

- ✓ Product longevity
- ✓ Reduced water damage potential
- ✓ Increased safety
- ✓ Increased safety
- ✓ Airflow control
- ✓ Safe working environment

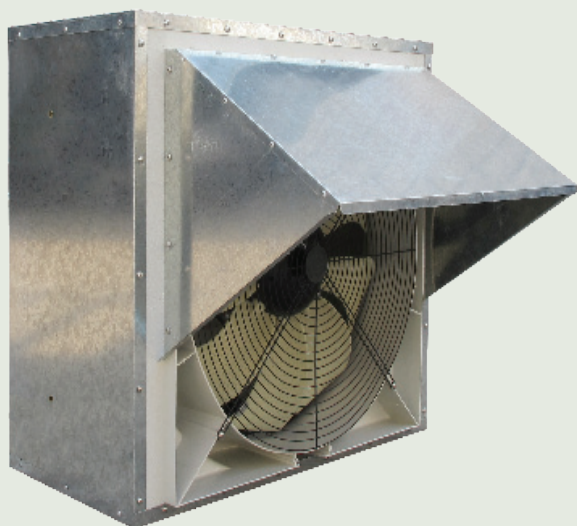


Applications:

- ⊕ Warehouses
- ⊕ Workshops
- ⊕ Factories
- ⊕ Agricultural
- ⊕ Horticultural

Industrial Wall Exhaust Louvred Fan

TECHNICAL DATA SHEET

SPECIFICATION		
Model No	IWLF6-11-6	IWLF6-11-6-3
Fan Dia	600mm	600mm
Fan Type	Axial	Axial
Power	1.1KW	1.1KW
Voltage	220~240V/50Hz	380V/50Hz
Connection	Fixed wiring	Fixed wiring
Current (A)	5.00	2.60
Speed RPM	6P	6P
Insulation class	F	F
IP Rating	IP44	IP44
Airflow L/s	5000	5000
dBa	<70	<70
Material of Blades	Nylon & Glass Fibre	Nylon & Glass Fibre
Material of Body	Galvanised steel	Galvanised steel
Material of Louvres	PVC	PVC
Measurements (mm)	830(L)x430(D)x770(H)	830(L)x430(D)x770(H)
Weight (kg)	38	38

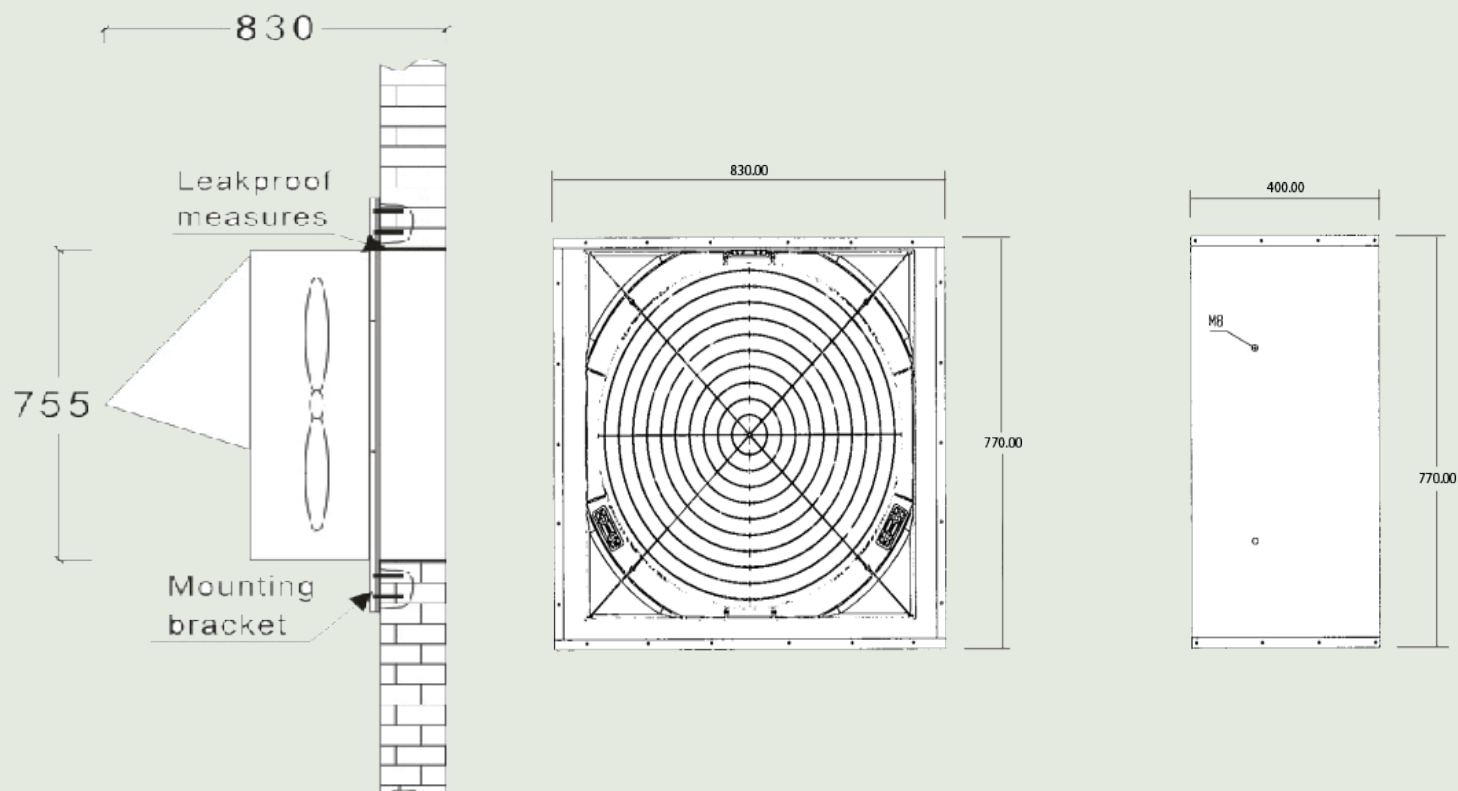

* The IWLF series require to be fitted with an "ON/OFF" isolation switch and must be earthed. A R.C.D (residual current device) is recommended to be fitted in the circuit. Qualified electrician is recommended to install this fan.