


Specifications


WMA (Manual Piezo Ignition)
WEA (Electronic Ignition)
WFA (Flexi Ray)

Mounting Brackets supplied
with all heaters.




WMA / WEA / WFA 16

Input 16 MJ, 4.44 KW
Width 401mm
Height 334mm (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 5.6kg




WMA / WEA / WFA 24

Input 24 MJ, 7.0 KW
Width 499mm
Height 334mm (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 6.5kg

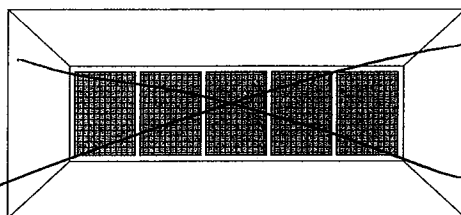

WMA / WEA / WFA 40

Input 40 MJ, 11.11 KW
Width 695mm
Height 334mm (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 8.4kg

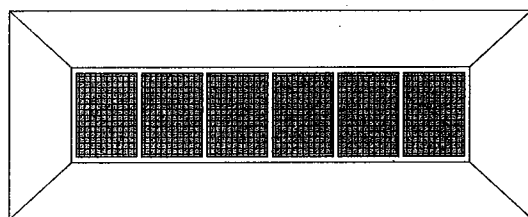

WMA / WEA / WFA 48

Input 48 MJ, 14KW
Width 793mm
Height 334mm (WFA Model 2030mm)
Depth 180mm (WFA Model 450mm)
Weight 9.3kg

Gas Pressure (KPA)

Natural Gas
LPG

Min

0.98
2.75

Max


4
4

Gas Connection (all models)

Natural Gas 1/2" copper flare
LPG 3/8" copper flare

Size	Approx. Area Heated		Approx. Positioning for Total heating		Approx. Height from floor	Ceiling Clearance
	M2		A Metres	B Metres	Metres	Metres
	Spot	Total	Facing Each Other	Side by side		
16	19	25.0	8.0	6.1	2.5	0.9
24	28	37.0	9.8	7.3	2.7 - 3.4	1.0
40	47	62.0	15.0	9.0	3.4 - 4.5	1.0
48	56	74.0	17.0	10.0	3.9 - 4.9	1.0

(If insufficient ceiling clearance available use Optional heat shield)



NOTE: Minimum Mounting height above floor level is 2.5 metres.

These appliances should be installed and used in accordance with—AG601

Manufacturer's Installation Instructions, Local Gas Fitting Regulations, Municipal Building Codes,

A.G.A. Installation Code for gas Burning Equipment, and must be installed by an authorised person.

A.G.A. Approval 5492